
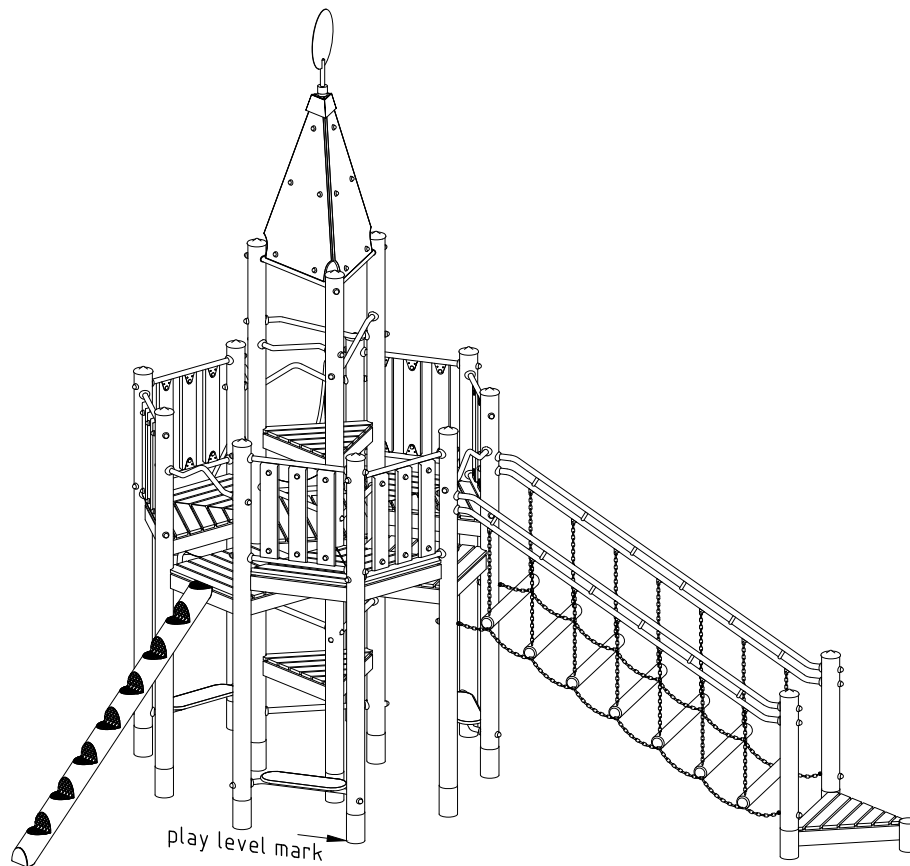


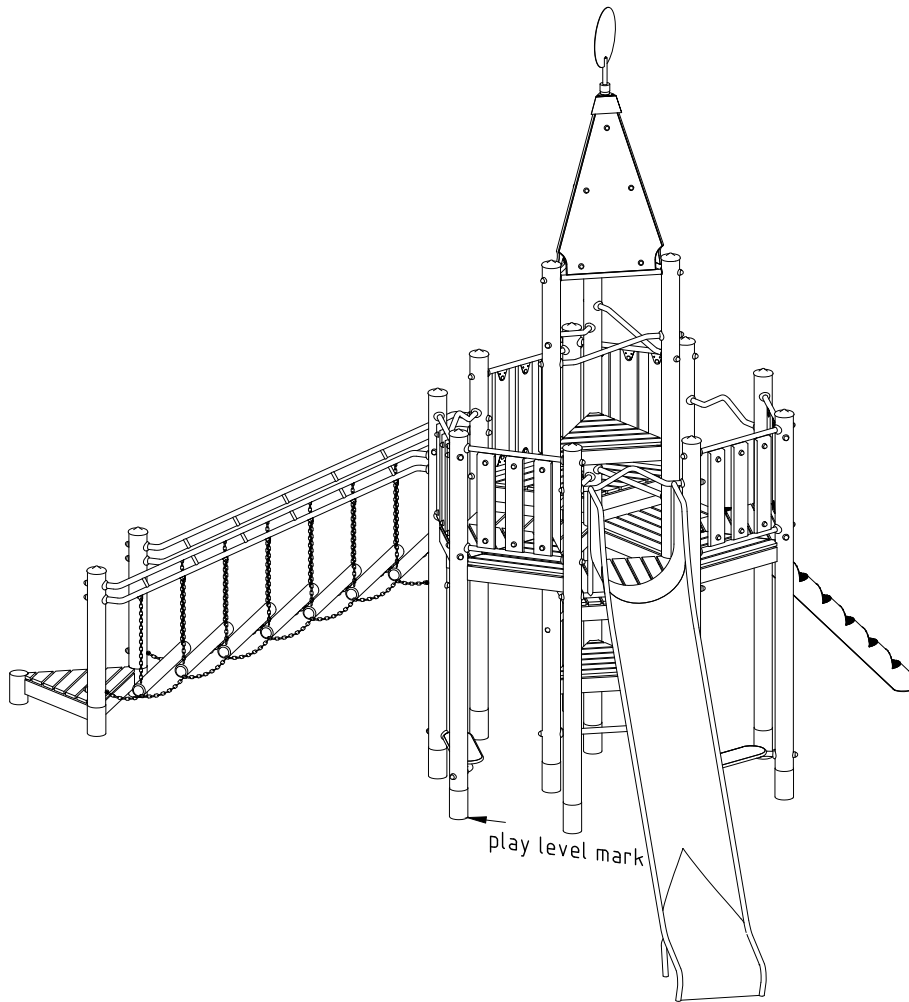

1. Assign a device location considering the space requirement (impact area).
Due to a possible sliding surface heating, please see to a north-east orientation (northern hemisphere) of the slides or provide half-shade of trees.
For countries in the southern hemisphere, see to a south-east orientation.
2. Excavate soil for foundations, according to drawing.
Please note: To achieve maximum stability and a safe installation, a moderate level of soil solubility is required.
3. Pour in a drain layer of gravel of approx. 10 cm thickness between the bottom of the posts and plain base of foundation.
4. Insert reinforcing steel into the corresponding holes of the posts.
5. Place posts type A according to the corresponding number (see foundation layout) into the respective foundation hole. Play level mark (=aluminium blind rivet) complies with the installation depth. Align every post by means of the play level mark facing into the same direction (see detail or foundation layout).

6. For installation of the pre-assembled components and/or single parts, the screws slightly have to be lubricated with installation paste!

Screw together platforms and posts by using the respective hole in the mounting brackets (according to "chart for platform fastening").

Tighten all screws after having aligned all components.

Install the slide exit with an inclination of 5° in sliding direction so that rain water can drain off.


Screw connections see details in attached list.

We recommend not to insert the protection caps enclosed before first maintenance as they are only suitable for one-time use (see description below).


7. Grout foundations with compressed concrete C20/25, chamfer and round off the edges, cover the foundations with a surface which meets the requirement for impact attenuation so that its critical fall height is equal to or greater than the maximum free height of fall of the equipment (acc. to EN 1176-1). The run-out section fall zone must have surfacing with a critical fall height of at least 1000 mm (acc. to EN 1176-3).
8. Release for play after concrete foundations have set.
9. According to maintenance instructions, check all screw connections after 4-5 weeks and retighten, if necessary. Afterwards cover the screw heads with protection caps as follows: Insert grey protection caps into the countersunk drills (e.g. for platforms). The non-countersunk drills (e.g. for railings or a slide) have to be covered with the red protection caps by placing them onto the base part. Strongly pound them (e.g. by using a plastic mallet) until they audibly snap into the base part groove.

Please ensure that all special tools supplied (e.g. Allen key for secured Allen screws etc.) and all specific documents which are or may be useful for safety management acc. to EN 1176-7 (e.g. invoice, delivery note, order acknowledgement, installation instructions, maintenance instructions) are forwarded to the persons responsible.

platform orientation/numbers
1:100

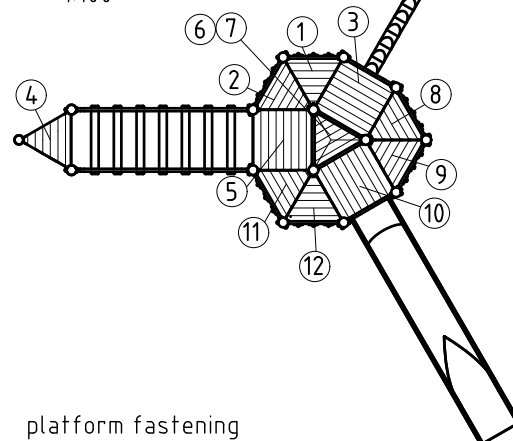

platform fastening
1:50




installation order
of square platforms:
1. platform no. 5
2. platform no. 3
3. platform no. 10


chart for platform fastening



platform-no	fastening hole		
	top	middle	bottom
1	x		
2			x
3	x		
4		x	
5	x		x
6		x	
7		x	
8	x		
9			x
10			x
11	x		
12			x

detail of check mark
1:5



platform fastening
1:10

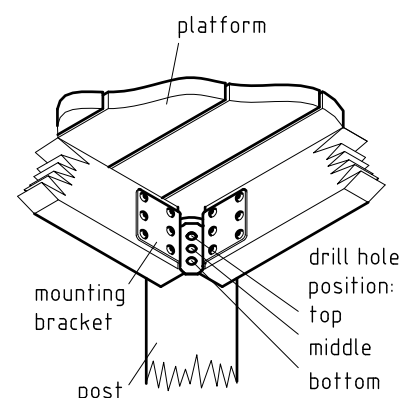

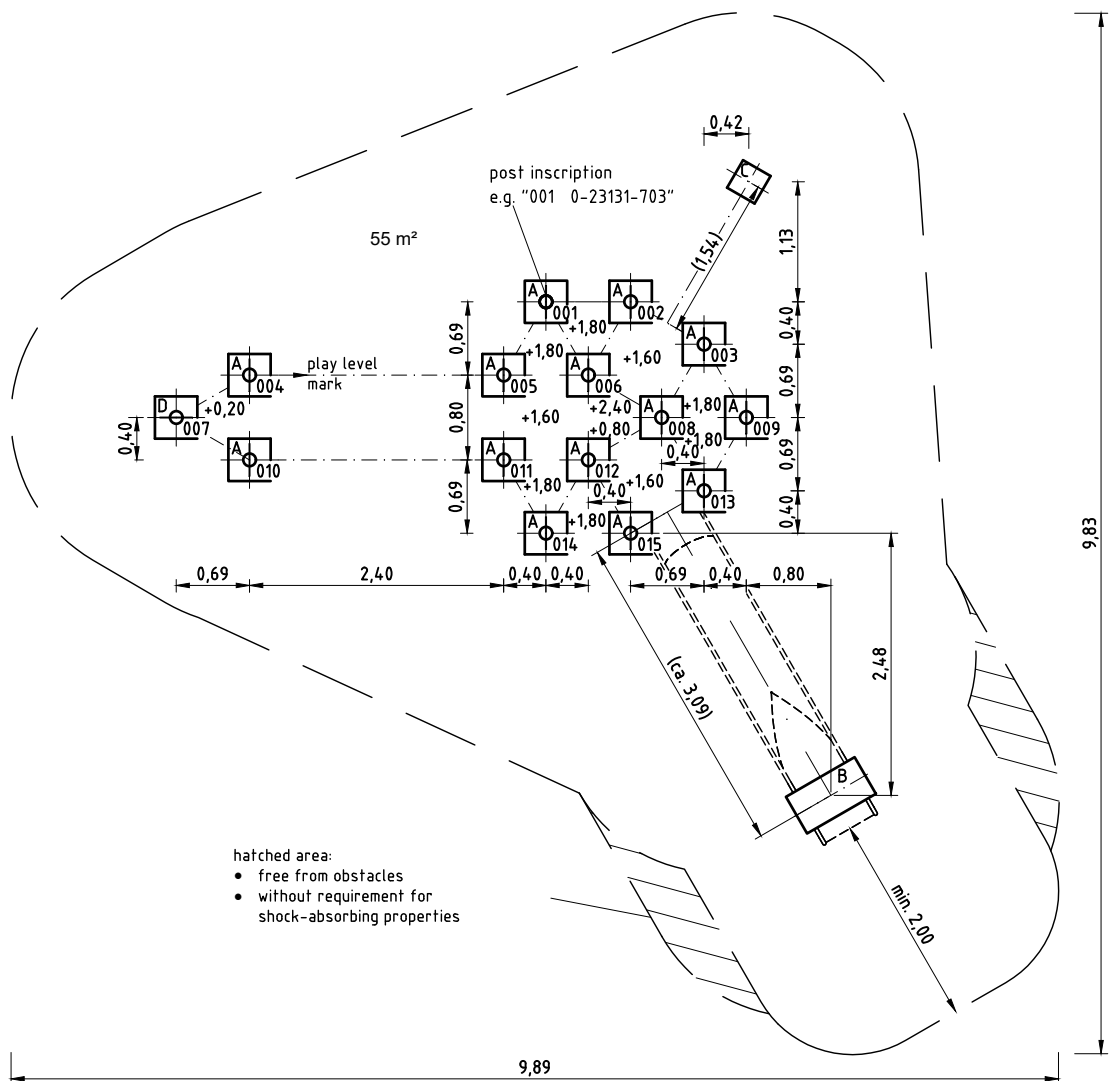
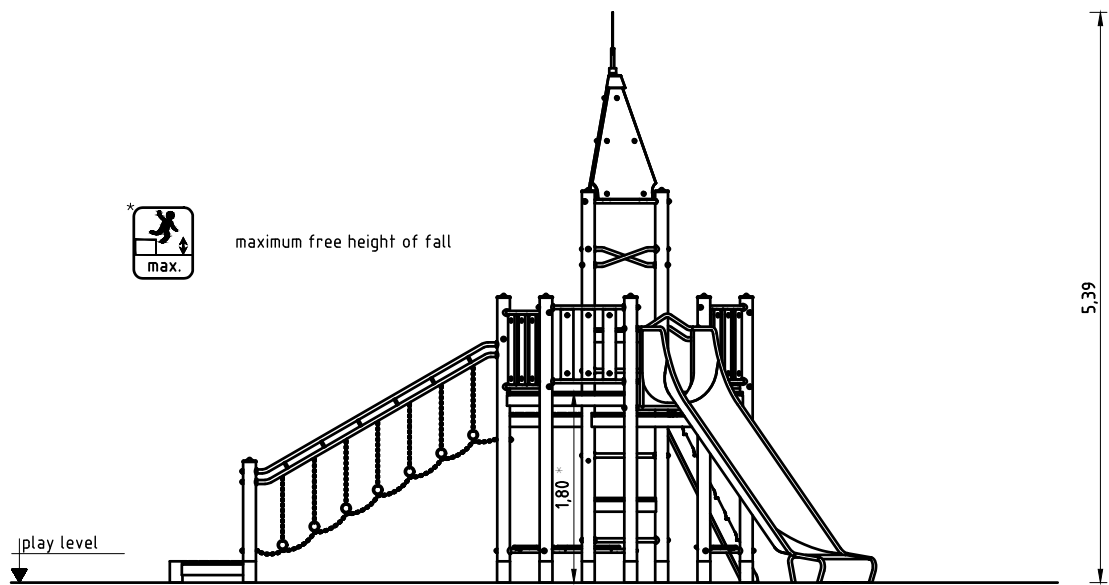


Please note:



Due to the format size, this installation is not to scale (apart from single details).

Please refer to the dimensions indicated.

An installation documentation scale 1:50 can be submitted on request.

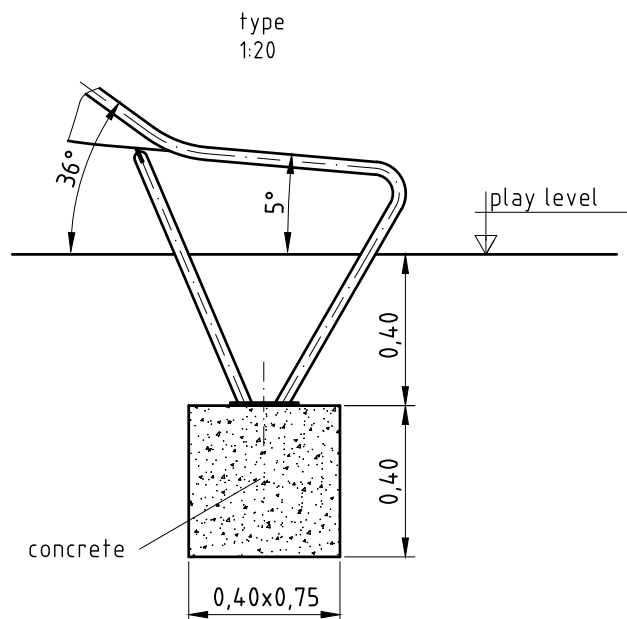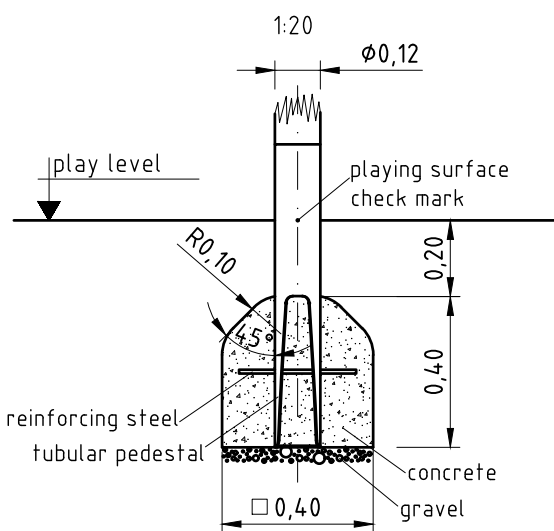


CO

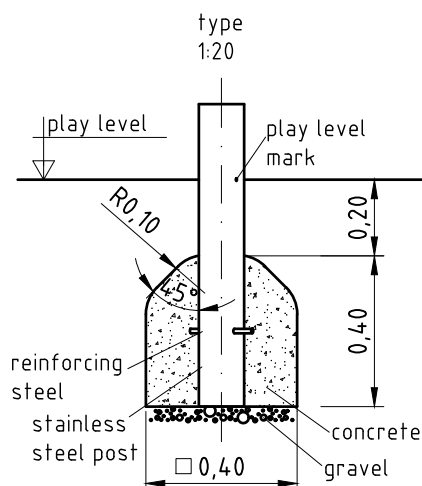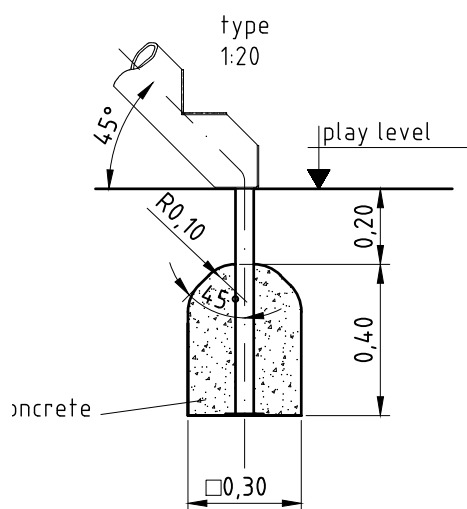


Item: 023131703
Order:

1298835


Play structure

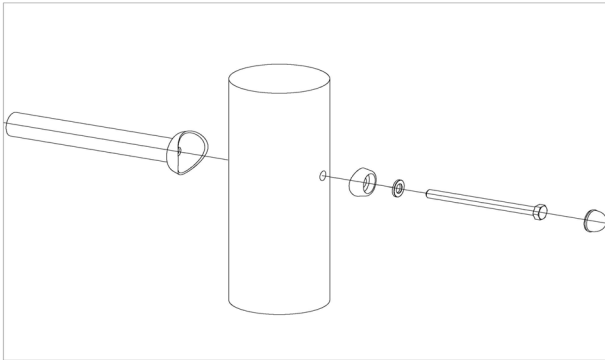Location:
Building Project:
62 x SFRS1210001 Standard bolting of components to Robinia posts (non-countersunk drilling)


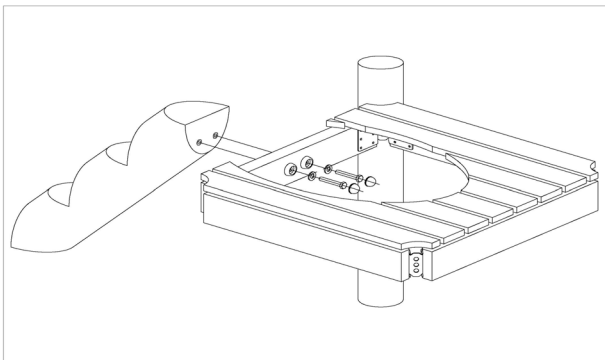
per SC	Total	K&K-Item	Marking
1 x	62 x	3300054	red protective screw cap - lower part, domed M12
1 x	62 x	3300055	red protective screw cap - upper part, M12
1 x	62 x	3430025	Washer Ø 13 DIN125 A2
1 x	62 x	3400702	Hexagon head cap screw M12 x 160 DIN931 A2 with screw security coating FGB red

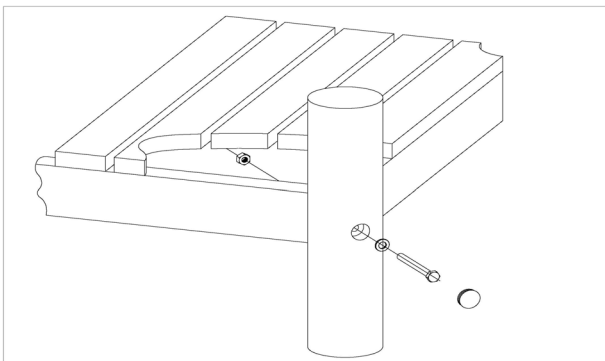36 x SFRS1200001 Platform at Robinia post, nut is platform-sided


per SC	Total	K&K-Item	Marking
1 x	36 x	3430129	Washer Ø 14 DIN1440 A2
1 x	36 x	3430021	Lock nut M12 DIN985 A2
1 x	36 x	3300016	Grey domed plastic cover cap SL 36 G
1 x	36 x	3400700	Hexagon head screw M12 x 120 DIN931 A2 with screw security coating/FGB red

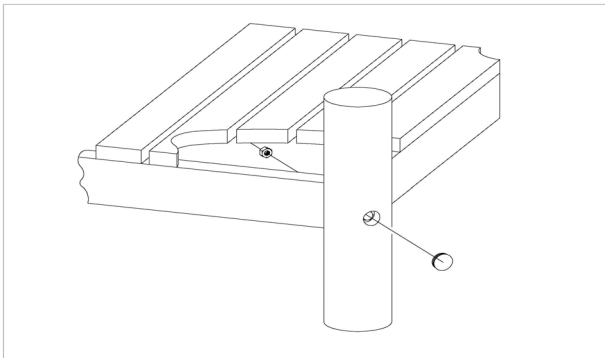3 x SFRS1200004 Platform at Robinia post screw fixed on production


per SC	Total	K&K-Item	Marking
1 x	3 x	3300016	Grey domed plastic cover cap SL 36 G
1 x	3 x	3430021	Lock nut M12 DIN985 A2

2 x SFXS1230004 Climbing post fastening to platform joist


per SC	Total	K&K-Item	Marking
1 x	2 x	3400414	hexagon head cap screw M12 x 75 DIN931 A2
1 x	2 x	3300055	red protective screw cap - upper part, M12
1 x	2 x	3430025	Washer Ø 13 DIN125 A2
1 x	2 x	3300045	Screw cover cap, flat, M 12 PA6 P1 (lower part) colour: red/RAL 2002

Item: **023131703**

Order:


1298835

Play structure

Location:


Building Project:

**4 x SFRS120009 Timber-course connecting chain for totter bridge/
totter bow to posts**

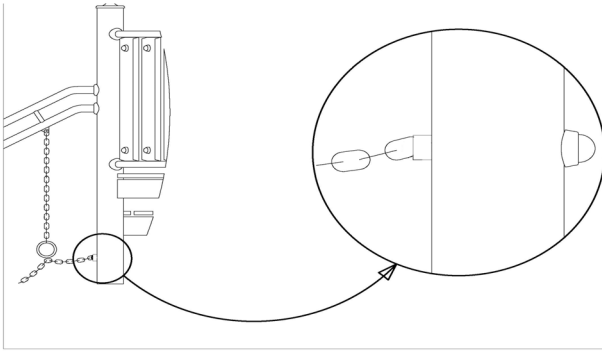


per SC	Total	K&K-Item	Marking
1 x	4 x	3430021	Lock nut M12 DIN985 A2
1 x	4 x	3300055	red protective screw cap - upper part, M12
1 x	4 x	3300054	red protective screw cap - lower part, domed M12
1 x	4 x	3430025	Washer Ø 13 DIN125 A2

3 x SFRS1240001 Fastening of tower roof frame with whirllig

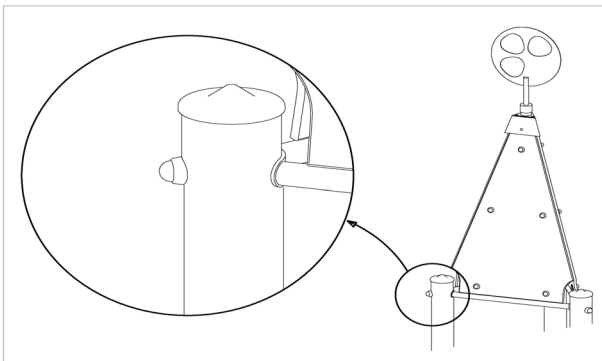


per SC	Total	K&K-Item	Marking
1 x	3 x	3400363	Hexagon head cap screw M12 x 150 DIN931 A2
1 x	3 x	3300055	red protective screw cap - upper part, M12
1 x	3 x	3300054	red protective screw cap - lower part, domed M12
1 x	3 x	3430051	Hexagon cap nut M12 DIN 986 A2
2 x	6 x	3430025	Washer Ø 13 DIN125 A2

**2 x SFXS1070006 Slide run-out section (up to 2,00 m) on foundation
stone bolt assembly**

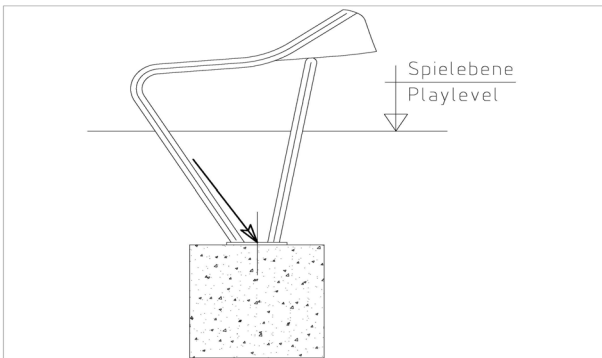

per SC	Total	K&K-Item	Marking
1 x	2 x	1070365	Set of stone bolts for slide run-out section M12x160

14 x SFES1270007 Reinforcing steel for tubular pedestals

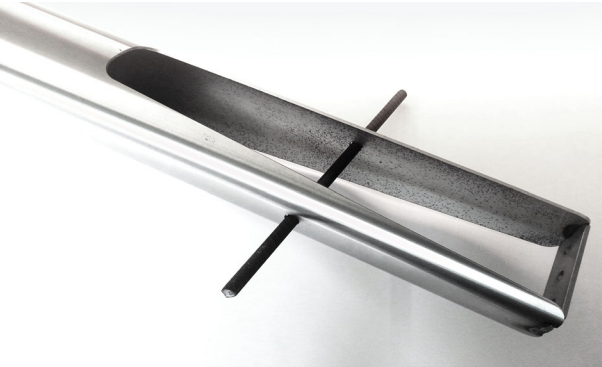

per SC	Total	K&K-Item	Marking
1 x	14 x	2130000	Reinforcing steel Ø 10 x 310 DIN 488

Item: **023131703**

Order:

1298835

Play structure

Location:

Building Project:

1 x SFRS1270002 Reinforcing steel for stainless steel posts



per SC	Total	K&K-Item	Marking
1 x	1 x	2130000	Reinforcing steel Ø 10 x 310 DIN 488

2 x SFWZ0000012 Lubricating metal (30 g box) incl. brush



per SC	Total	K&K-Item	Marking
1 x	2 x	5300039	Lubricating metal box 30g
1 x	2 x	5200026	Brush for lubricating metal