


Instructions for maintenance

In addition to the manufacturer-related service instructions, we strongly advise the operator/owner to consider the corresponding prescriptions of the European Standard EN1176-7.

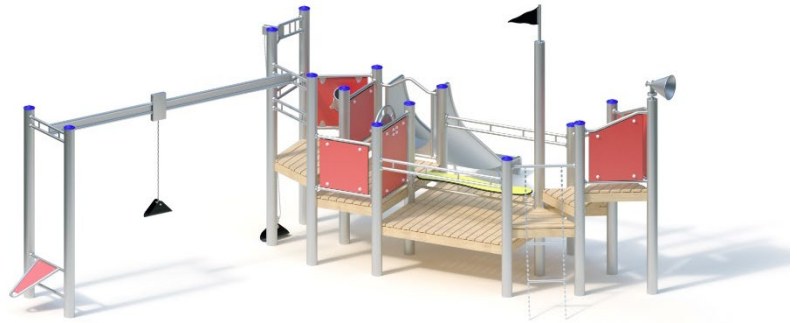

031650504

One-time maintenance

(exemplary colour illustration)



Check all screw connections; retighten, if necessary.

once,
approx. 4-5 weeks after installation

Recommended regular inspection and maintenance		once a week	twice per month	once a month	four times a year	twice a year	once a year
	Clean playing sand	☐	☒	☐	☐	☐	☐
	Check cleanliness of playing and safety area. Remove any foreign object	☐	☐	☒	☐	☐	☐
	Check chains of chain ladder for wear, replace if necessary. The nominal chain thickness must not diminish more than 30% (< 5 mm). Beyond that limit, a chain replacement is indispensable.	☐	☐	☒	☐	☐	☐
	Check rubber parts like seats, hoses, flaps, collars for wear, replace if necessary	☐	☐	☒	☐	☐	☐
	Check cleanliness of sliding surfaces, remove protruding parts, exchange damaged sliding course coverings	☐	☐	☒	☐	☐	☐
	In case of drying cracks, remove splinters of wood and chamfer sharp edges	☐	☐	☒	☐	☐	☐
	Check tightness of stand construction: stability of (vertical) posts or supports, retighten screw connections, if necessary.	☐	☐	☐	☐	☒	☐
	Check further structural components for wear and tightness; retighten, if necessary and replace defective parts.	☐	☐	☐	☐	☒	☐
	Check bearings and/or joints for tight fixing and easy-running function, replace or grease, if necessary (megaphone).	☐	☐	☐	☐	☒	☐
	Check foundations and structural construction for corrosion or decay, repair or replace if necessary	☐	☐	☐	☐	☐	☒

Please note: The above-mentioned maintenance intervals only have recommendatory character. They must necessarily be adapted to the local circumstances of each playground (frequency of use, social setting, risk and frequency of vandalism etc.).